

KAPSEN®



PTC GROUP

SHANDONG HONGSHENG RUBBER TECHNOLOGY CO., LTD

Address: Dawang Industrial park, Dongying, Shandong, China

Sales Hotline: 0546-7722888

E-mail: hsrubber@163.com

PTC GROUP



KAPSEN TIRE · TAKE YOU TO THE GREEN WORLD



www.hstirechina.com

 **PTC GROUP**

COMPANY PROFILE >>

Shandong Huasheng Rubber Co., Ltd, established in 1994, located in Dongying, Shandong Province, is a large private company engaged in Researching& Developing, Producing and Marketing of tires. Supported by strong capability of R&D, precise equipment, advanced management, our TBR, PCR series tires have been exporting to Europe, America, Middle East, Africa, South-east Asia and Oceania. The offered high quality tires with excellent services gain long term partners, more and more.

Our PCR factory covers an area of 400, 000 square meters, will produce 25 million pcs a year, including ranges HP, UHP, HT, AT, MT, LT(VAN), from 13" to 32". We imported equipment from Germany, Italy, The Netherland, USA, Japan, Korea, and cooperate with excellent foreign engineer team, to make sure the tires are advanced in appearance, quality and performance.

We believe in growing with customers, devote ourselves to end users' good experiences. Huasheng would like to go forward hand by hand with customers and create a brilliant future together.

 **PTC GROUP**

SORT	RFT	UHP	UHP
	K3000	S2000	K3000
PATTERN			
PERFORMANCE	   	   	   

SORT	SUV-A/T	SUV-M/T	SUV-H/T
	RS23	RS25	RS21
PATTERN			
PERFORMANCE	   	   	   

SORT	SUV-H/P	Drifting	H/P
	RS26	S3000	K737
PATTERN			
PERFORMANCE	   	   	   

SORT	AS	H/P	TAXI
	H202	A4	RS01
PATTERN			
PERFORMANCE	   	   	   

SORT	H/T	LTR	S/T
	RS27	RS01	RS03
PATTERN			
PERFORMANCE	   	   	   

SORT	WINTER	WINTER	WINTER
	RW501	AW11	A33
PATTERN			
PERFORMANCE	   	   	   

1986

Established
in China

rubber production
made in China

EVENTS /

Made in China can provide a plenty and
higher quality production for global users

- 1995-Established Hongsheng Rubber Co., Ltd. produce rubber hose, bias tyres.
- 2008-Established Huasheng Rubber Co., Ltd., produce TBR with capacity of 1.2 million sets in the first phase.
- 2011-produces TBR with capacity of 1.2 million sets in the second phase.
- 2013-produces TBR with capacity of 1 million sets in the third phase.
- 2013-Hongsheng Rubber Co., Ltd. conveyor belt project put into production.
- 2014-Established Hongsheng Rubber Technology Co., Ltd. Produces PCR with production capacity of 24 million sets per year.
- 2016- The company's R & D team creates new brand ROADBOSS super quality tires.
- 2017-Established Shandong Qilun Rubber Co., Ltd.
- 2018-Established Shandong Zhangao Rubber Co., Ltd.
- 2019-Established Heda (Shandong) Rubber Co., Ltd.

COMPETITION PROMOTION

THE CHINA RING TOWER RALLY, THE FULL NAME IS THE RING TOWER KARAMAGAN AUTO MOTOCROSS RALLY, AND THE CHINA OFF-ROAD SERIES XINJIANG STATION.

The China Ring Tower Rally, the full name is the Ring Tower Karamagan Auto Motocross Rally, and the China Off-Road Series Xinjiang Station. It is a national A-level sports event held annually. The Ring Tower Rally was founded in 2005. The founders are Su Haobo, Fang Zheng and He Junhui. Since 2011, the Ring Tower Rally has been officially upgraded to an international level. It is the first in Asia and the largest domestic car, motorcycle and truck on the same field. Competitive authority brand cross-country international competition. The competition was co-sponsored by the Automobile and Motorcycle Sports Management Center of the State General Administration of Sport and the Xinjiang Uygur Autonomous Region Sports Bureau, and jointly sponsored by the China Automobile and Motor Sports Federation, Xinjiang Motor Sports Association, Xinjiang Motor Sports Association, and Xinjiang Ring Tower Motor Sports Club Co., Ltd.

PARTICIPATING IN VARIOUS SPORTS AND COMPETITIONS


- CHINA HUANTA RALLY
- CBA SHANDONG QINGDAO AGAINST SHANXI FENJIU MATCH
- 2019 CHINA INTERNATIONAL AUTOMOBILE UPGRADING KIT AND MODIFIED VEHICLE EXHIBITION





K3000
35/40/45/50/55

The K3000 is a high-performance sport and safety tire (UHP), specially developed for medium and high-class passenger cars. It maintains the support and control of the tire to ensure your driving safety under the condition of air shortage.



Adopt Imported Rayon as skeleton material, high flexure strength and excellent stability;



multi-pitch design, improve drainage performance and wetland grip, effectively reduce noise during driving;



Silencer design, disrupt the pattern groove high-speed airflow, reduce the noise caused by the pumping effect, to provide you with a more quiet space.



Low heat generation support rubber formula, the tire after the support to continue driving.



Asymmetric pattern, outside reinforcement design, effectively inhibit the vehicle turning or braking deformation, turning to provide more powerful support, excellent dry handling performance and braking performance;

Born for safe driving, better performance


The RFT technology used by the Roadboss brand, under certain circumstances, can effectively prevent the vehicle from running out of control due to puncture. Not only that, it strengthens the sidewall support and makes the tire perform well.



Performance visualization

dry
wet
athletic
comfortable
Mute

Run Flat Technology (RFT)

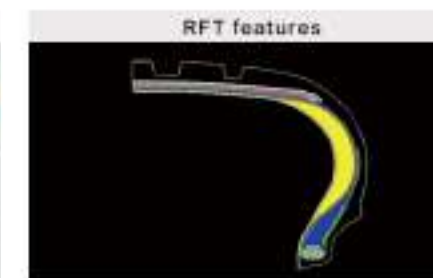

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
205	/	55	ZRF	16	94W	XL	6.5	670	340	632	214	
205	/	45	ZRF	17	88W	XL	7.0	560	340	616	206	
205	/	50	ZRF	17	93W	XL	6.5	650	340	638	214	
225	/	45	ZRF	17	94W	XL	7.5	670	340	634	225	
225	/	50	ZRF	17	98W	XL	7.0	750	340	658	233	
225	/	55	ZRF	17	101W	XL	7.0	825	340	680	233	
225	/	40	ZRF	18	92W	XL	8.0	630	340	637	230	
225	/	45	ZRF	18	95W	XL	7.5	690	340	659	225	
225	/	50	ZRF	18	99W	XL	7.0	775	340	683	233	
245	/	45	ZRF	18	100W	XL	8.0	800	340	677	243	
255	/	40	ZRF	18	99Y	XL	9.0	775	340	661	260	
235	/	45	ZRF	19	99Y	XL	8.0	775	340	695	236	
235	/	50	ZRF	19	103W	XL	7.5	875	340	719	245	
235	/	55	ZRF	19	105W	XL	7.5	925	340	741	245	
245	/	40	ZRF	19	98Y	XL	8.5	750	340	679	248	
245	/	45	ZRF	19	102Y	XL	8.0	850	340	703	243	
245	/	50	ZRF	19	105W	XL	7.5	925	340	729	253	
255	/	45	ZRF	19	104W	XL	8.5	900	340	713	255	
255	/	50	ZRF	19	107W	XL	8.0	975	340	739	265	
275	/	35	ZRF	19	100Y	XL	9.5	800	340	675	278	
275	/	40	ZRF	19	105W	XL	9.5	925	340	703	278	
245	/	40	ZRF	20	99Y	XL	8.5	775	340	704	248	
245	/	45	ZRF	20	103Y	XL	8.0	875	340	728	243	
275	/	40	ZRF	20	106W	XL	9.5	950	340	728	278	
315	/	35	ZRF	20	110Y	XL	11	1060	340	728	320	



S2000

35/40/45/50/55

S2000 seeks exercise limit and extreme experience. The excellent high speed ability, handling in both dry and wet conditions, security and green design, make it to be preferred choice for luxury cars. Her stable performance is worthy of your trust.



Special asymmetrical design provides excellent grip and handling in both dry wet conditions.




The updated SSBPand silica compound provide excellent wet grip, much reduced rolling resistance, and terrific handling in high speed.



Sipes on outside shoulder enhance turning handling and low down noise in high speed.



The dramatic 2 central big grooves with special compound, enhances efficient water evacuation to deal with all conditions.



The high content white carbon black and solution polymerized SBR were used in tread formulation to reduce rolling resistance and improve the performance of wetland.



Size				LI&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
						inch	kg	kPa	mm	mm	
195	/	45	R	16	84V	XL	6.5	500	340	582	195
195	/	50	R	16	88V	XL	6.0	560	340	602	201
195	/	55	R	16	91V	XL	6.0	615	340	620	201
205	/	45	ZR	16	87W	XL	7.0	545	340	590	206
205	/	50	ZR	16	91W	XL	6.5	615	340	612	214
205	/	55	ZR	16			6.5	615	300	632	214
205	/	55	ZR	16	94W	XL	6.5	670	340	632	214
215	/	45	ZR	16	90W	XL	7.0	600	340	600	213
215	/	55	ZR	16	97W	XL	7.0	730	340	642	226
225	/	50	ZR	16	96W	XL	7.0	710	340	632	233
225	/	55	ZR	16	99W	XL	7.0	775	340	654	233
205	/	40	ZR	17	84W	XL	7.5	500	340	596	212
205	/	45	ZR	17	88W	XL	7.0	560	340	616	206
205	/	50	ZR	17	93Y	XL	6.5	650	340	638	214
215	/	40	ZR	17	87W	XL	7.5	545	340	604	218
215	/	45	ZR	17	91W	XL	7.0	615	340	626	213
215	/	50	ZR	17	95W	XL	7.0	690	340	648	226
215	/	55	ZR	17	98W	XL	7.0	750	340	668	226
225	/	45	ZR	17	94W	XL	7.5	670	340	634	225
225	/	50	ZR	17	98W	XL	7.0	750	340	658	233
225	/	55	ZR	17	101W	XL	7.0	825	340	680	233
235	/	45	ZR	17	97W	XL	8.0	730	340	644	236
235	/	50	ZR	17	100W	XL	7.5	800	340	668	245
235	/	55	ZR	17	103W	XL	7.5	875	340	690	245
245	/	40	ZR	17	95W	XL	8.5	690	340	628	248
245	/	45	ZR	17	99W	XL	8.0	775	340	652	243
255	/	45	ZR	17	102Y	XL	8.5	850	340	662	255
215	/	35	ZR	18	84Y	XL	7.5	500	340	607	218
215	/	40	ZR	18	89Y	XL	7.5	580	340	629	218
215	/	45	ZR	18	93W	XL	7.0	650	340	651	213
225	/	40	ZR	18	92W	XL	8.0	630	340	637	230
225	/	45	ZR	18	95W	XL	7.5	690	340	659	225
235	/	40	ZR	18			8.5	690	340	645	241
235	/	45	ZR	18	98W	XL	8.0	750	340	669	236
235	/	50	ZR	18	101W	XL	7.5	825	340	693	245
245	/	40	ZR	18	97W	XL	8.5	730	340	653	248
245	/	45	ZR	18	100W	XL	8.0	800	340	677	243
255	/	35	ZR	18	94Y	XL	9.0	670	340	635	260
255	/	40	ZR	18	99Y	XL	9.0	775	340	661	260
255	/	45	ZR	18	103W	XL	8.5	875	340	687	255
265	/	35	ZR	18	97Y	XL	9.5	730	340	643	271
225	/	35	ZR	19	88Y	XL	8.0	560	340	641	230
235	/	35	ZR	19	91W	XL	8.5	615	340	647	241
235	/	45	ZR	19	99Y	XL	8.0	775	340	695	236
245	/	35	ZR	19	93W	XL	8.5	650	340	655	248
245	/	40	ZR	19	98Y	XL	8.5	750	340	679	248
245	/	45	ZR	19	102Y	XL	8.0	850	340	703	243
255	/	35	ZR	19	96Y	XL	9.0	710	340	661	260
225	/	35	ZR	20	90W	XL	8.0	600	340	666	230
235	/	35	ZR	20	92W	XL	8.5	630	340	672	241
245	/	35	ZR	20	95W	XL	8.5	690	340	680	248
245	/	40	ZR	20	99Y	XL	8.5	775	340	704	248
245	/	45	ZR	20	103Y	XL	8.0	875	340	728	243
255	/	35	ZR	20	97W	XL	9.0	730	340	686	260



K3000

35/40/45/50/55

K3000 is a sport and comfortable high performance tire specially developed for medium and high class cars. Strong Grip and control give you an accurate driving experience. Lower Noise, lower rolling resistance, enjoy the comfortable life of people and cars.



Increase the ground ratio of the tire, optimize the profile and structure of the tire, make the ground ratio of the tire bigger, provide more powerful grip;



multi-pitch design, improve drainage performance and wetland grip, effectively reduce noise during driving;



Silencer design, disrupt the pattern groove high-speed airflow, reduce the noise caused by the pumping effect, to provide you with a more quiet space.



Low heat generation support rubber formula, the tire after the support to continue driving.



Asymmetric pattern, outside reinforcement design, effectively inhibit the vehicle turning or braking deformation, turning to provide more powerful support, excellent dry handling performance and braking performance;



Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							Inch	kg	kPa	mm	mm	
195	/	45	R	16	84V	XL	6.5	500	340	582	195	
195	/	50	R	16	88V	XL	6.0	560	340	602	201	
195	/	55	R	16	91V	XL	6.0	615	340	620	201	
205	/	45	ZR	16	87W	XL	7.0	545	340	590	206	
205	/	55	ZR	16	94W	XL	6.5	670	340	632	214	
215	/	55	ZR	16	97W	XL	7.0	730	340	642	226	
205	/	40	ZR	17	84W	XL	7.5	500	340	595	212	
205	/	45	ZR	17	88W	XL	7.0	560	340	616	206	
205	/	50	ZR	17	93W	XL	6.5	650	340	638	214	
215	/	45	ZR	17	91W	XL	7.0	615	340	625	213	
215	/	50	ZR	17	95W	XL	7.0	690	340	648	226	
215	/	55	ZR	17	98W	XL	7.0	750	340	668	226	
225	/	45	ZR	17	94W	XL	7.5	670	340	634	225	
225	/	50	ZR	17	98W	XL	7.0	750	340	658	233	
225	/	55	ZR	17	101W	XL	7.0	825	340	680	233	
235	/	45	ZR	17	97W	XL	8.0	730	340	644	236	
225	/	40	ZR	18	92W	XL	8.0	630	340	637	230	
225	/	45	ZR	18	95W	XL	7.5	690	340	659	225	
225	/	50	ZR	18	99W	XL	7.0	775	340	683	233	
235	/	40	ZR	18	95W	XL	8.5	690	340	645	241	
235	/	45	ZR	18	98W	XL	8.0	750	340	669	236	
245	/	45	ZR	18	100W	XL	8.0	800	340	677	243	
255	/	40	ZR	18	99Y	XL	9.0	775	340	661	260	
265	/	35	ZR	18	97Y	XL	9.5	730	340	643	271	
235	/	45	ZR	19	99Y	XL	8.0	775	340	695	236	
235	/	50	ZR	19	103W	XL	7.5	875	340	719	245	
235	/	55	ZR	19	105W	XL	7.5	925	340	741	245	
245	/	40	ZR	19	98Y	XL	8.5	750	340	679	248	
245	/	45	ZR	19	102Y	XL	8.0	850	340	703	243	
245	/	50	ZR	19	105W	XL	7.5	925	340	729	253	
255	/	45	ZR	19	104W	XL	8.5	900	340	713	255	
255	/	50	ZR	19	107W	XL	8.0	975	340	739	265	
275	/	35	ZR	19	100Y	XL	9.5	800	340	675	278	
275	/	40	ZR	19	105W	XL	9.5	925	340	703	278	
245	/	40	ZR	20	99Y	XL	8.5	775	340	704	248	
245	/	45	ZR	20	103Y	XL	8.0	875	340	728	243	
275	/	40	ZR	20	106W	XL	9.5	950	340	728	278	
315	/	35	ZR	20	110Y	XL	11.0	1060	340	728	320	
275	/	40	ZR	21	107Y	XL	9.5	975	340	753	278	
315	/	35	ZR	21	111Y	XL	11.0	1090	340	753	320	
195	/	55	RF	16	91V	XL	6.0	615	340	620	201	

KAPSEN®



RS23

50/60/65/70/75/85

RS23 is a SUV tire suitable for all road conditions. While satisfying the performance of paved roads, it highlights the grip and sports performance of non-paved roads such as mountain roads, dirt roads and snow roads. The tiger-tooth pattern design provides powerful off-road performance for the car, and the use of a cut-resistant formula greatly improves the life of the tire pattern.



Tiger tooth-shaped three-dimensional three-dimensional block provides excellent grip performance on paved and non-paved roads.



The mixed pattern groove design guarantees the grip of mountain roads, mud and snow roads.



Special shoulder reinforcement design to prevent non-paved road from damaging the tires and bring you endless driving experience.



The irregular groove design guarantees the grip and strong off-road ability of non-paved roads.



[Tire Shoulder Scratch Resistance Design] Improves puncture resistance and scratch resistance.
[Tread Convex White Letter Design] Make the tire appearance eye-catching, beautiful and fashionable.



Drainage



Handling



Off-road



Safety

■ Performance visualization

Dry land -----
wet land -----
sport -----
comfortable -----
mileage -----

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							Inch	kg	kPa	mm	mm	
215	/	70	R	16	100T		6.5	800	300	708	221	
225	/	70	R	16	103T		6.5	875	300	722	228	
235	/	70	R	16	106T		7.0	950	300	736	240	
245	/	70	R	16	111T	XL	7.0	1090	340	750	248	
255	/	70	R	16	111T		7.5	1090	300	764	260	
275	/	70	R	16	114T		8.0	1180	300	792	279	
245	/	70	R	17	110S		7.0	1060	300	776	248	
255	/	65	R	17	110T		7.5	1060	300	764	260	
265	/	65	R	17	112T		8.0	1120	300	776	272	
275	/	65	R	17	119S	XL	8.0	1360	340	790	279	
285	/	65	R	17	116S		8.5	1250	300	802	292	
265	/	60	R	18	110T		8.0	1060	300	775	272	
285	/	60	R	18	116H		8.5	1250	300	799	292	
285	/	50	R	20	116Q	XL	9.0	1250	340	794	297	
31	x	10.5	R	15	109S		8.5	1030	350	775	268	
215	/	75	R	15	100/97S		6.0	800/730	350	703	216	
225	/	75	R	15	102/99S		6.0	850/775	350	719	223	
235	/	75	R	15	104/101S		6.5	900/825	350	733	235	
215	/	85	R	16	115/112S		6.0	1215/1120	550	772	216	
225	/	75	R	16	115/112S		6.0	1215/1120	550	744	223	
235	/	70	R	16	110/107S		7.0	1060/975	450	736	240	
235	/	85	R	16	120/116S		6.5	1400/1250	550	806	235	
245	/	75	R	16	120/116S		7.0	1400/1250	550	774	248	
265	/	70	R	16	117/114T		8.0	1285/1180	450	778	272	
265	/	70	R	17	121/118S		8.0	1450/1320	550	804	272	
265	/	65	R	17	120/117S		8.0	1400/1285	550	776	272	
265	/	75	R	16	123/120S		7.5	1550/1400	550	804	267	
285	/	75	R	16	126/123S		8.0	1700/1550	550	834	286	

KAPSEN®



RS25

65/70/75/85

RS23 is a SUV tire suitable for all road conditions. While satisfying the performance of paved roads, it highlights the grip and sports performance of non-paved roads such as mountain roads, dirt roads and snow roads. The tiger-tooth pattern design provides powerful off-road performance for the car, and the use of a cut-resistant formula greatly improves the life of the tire pattern.



The optimized combination design of huge blocks and grooves provides excellent driving force, grip and anti-skid performance on non-paved roads;



The protective dam and rough design on the tire shoulder and the reinforced design of the tire shoulder, to improve the impact resistance of the shoulder, thus greatly improving the durability;



The double-layer reinforced belt layer and the special specification three-layer reinforced carcass design greatly improve the overall strength of the tire and catch the requirements of the worst road conditions;



Single winding hexagonal bead design, which greatly improves the durability stability of the tire bead.



[Outstanding white letter design (RWL) tyre sidewall]
Mack the tyre of eye-catching, beautiful, fashion

[Tyre shoulder friction line design]
Improved stabbing and rubbing resistance, durable wear resistance.

Triple row mud technology pattern ditch can intelligently clean residual silt.

Triple stone row technique tread pattern can row stone by itself.

Triple climbing technique tyre shoulder provides super grip.



Performance visualization



Drainage



Braking



Off-road



Safety

Performance on the road -----
performance on off-road -----
performance in mud -----
performance in sand -----
performance of upslope -----

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
31	x	10.5	R	15	109Q		8.5	1030	350	775	268	
235	/	85	R	16	120/116Q		6.5	1400/1250	550	806	235	
245	/	70	R	16	106/103Q		7.0	950/875	350	750	248	
245	/	75	R	16	120/116Q		7.0	1400/1250	550	774	248	
265	/	70	R	16	117/114Q		8.0	1285/1180	450	778	272	
245	/	65	R	17	111/108Q		7.0	1090/1000	450	750	248	
265	/	65	R	17	120/117Q		8.0	1400/1285	550	772	276	
265	/	70	R	17	121/118Q		8.0	1450/1320	550	804	272	
265	/	75	R	16	123/120Q		7.5	1550/1400	550	804	267	
285	/	75	R	16	126/123Q		8.0	1700/1550	550	834	286	

KAPSEN



RS21

50/55/60/65/70/75

RS21 is specially designed for the king who constantly pursues sports extremes and enjoys the ultimate driving experience. With its excellent high-speed driving ability, excellent wet and dry road handling performance, and the introduction of safe, environmentally friendly design concepts, consistent and stable performance, it is worthy of your full trust!



The four main grooves cooperate with the horizontal grooves to provide excellent drainage performance and ensure the safety of driving in heavy rain.



Rigid and uniform block design, combined with the continuous central ribs, can improve the stability of the tire in straight running.



The grooved step-like design prevents stones from being trapped when driving on country roads;



Decorative shoulder three-dimensional step design, beautiful and heat dissipation.



The design of curved fine grooves greatly reduces the water film between the road surface and the tire in rainy days, and prevents the occurrence of water sliding.




The latest formula of polybutadiene and silicon-containing technology makes the grounding area more compact; effectively improves wetland performance, reduces rolling resistance, and provides excellent handling performance.



Quiet noise reduction

3D pattern groove design, optimized combination of shoulder pattern design, providing comfortable driving experience.

Performance visualization

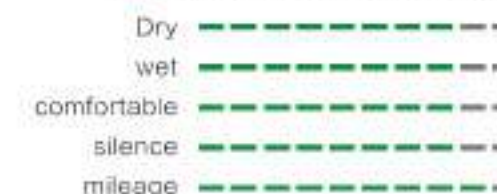

Braking



Drainage



Handling



Safety

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
235	/	75	R	15	105H		6.5	925	300	733	235	
215	/	70	R	16	100H		6.5	800	300	708	221	
225	/	70	R	16	103H		6.5	875	300	722	228	
235	/	60	R	16	100H		7.0	800	300	688	240	
235	/	70	R	16	106H		7.0	950	300	736	240	
245	/	70	R	16	111H	XL	7.0	1090	340	750	248	
255	/	70	R	16	111H		7.5	1090	300	764	260	
265	/	70	R	16	112H		8.0	1120	300	778	272	
265	/	75	R	16	116H		7.5	1250	300	804	267	
275	/	70	R	16	114H		8.0	1180	300	792	279	
215	/	50	R	17	95H	XL	7.0	690	340	648	226	
215	/	65	R	17	99H		6.5	775	300	712	221	
225	/	60	R	17	99H		6.5	775	300	702	228	
225	/	65	R	17	102H		6.5	850	300	724	228	
235	/	55	R	17	99H		7.5	775	300	690	245	
235	/	60	R	17	106H	XL	7.0	950	340	714	240	
235	/	65	R	17	108H	XL	7.0	1000	340	738	240	
245	/	65	R	17	111H	XL	7.0	1090	340	750	248	
265	/	65	R	17	112H		8.0	1120	300	776	272	
265	/	70	R	17	115H		8.0	1215	300	804	272	
225	/	60	R	18	100H		6.5	800	300	727	228	
235	/	50	R	18	101H	XL	7.5	825	340	693	245	
235	/	55	R	18	104H	XL	7.5	900	340	715	245	
235	/	60	R	18	107H	XL	7.0	975	340	739	240	
255	/	55	R	18	109V	XL	8.0	1030	340	737	265	
265	/	60	R	18	114V	XL	8.0	1180	340	775	272	



RS26

30/35/45/50/55/60

RS26 is a top-end luxury tire specially developed for SUVs, which enables your car to have sports car-like handling, high stability and luxury car-like comfort under a variety of road conditions.



Adopting the gradual groove depth design, the pattern block is strong; the stability of the shoulder can optimize the dry grip of the tire.



Semi-closed groove design on both sides of the tread, lower noise;



The asymmetrical pattern design makes the tires have superior grip and braking performance, and better handling.



The wide pattern groove design improves drainage performance and effectively avoids tire slippage on wet roads.



Performance visualization

Dry land -----
wet land -----
comfortable -----
quiet -----
mileage -----

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
235	/	55	ZR	17	103W	XL	7.5	875	340	690	245	
235	/	65	R	17	108V	XL	7.0	1000	340	738	240	
215	/	55	R	18	99W	XL	7.0	775	340	693	226	
225	/	55	ZR	18	102W	XL	7.0	850	340	705	233	
235	/	50	ZR	18	101W	XL	7.5	825	340	693	245	
235	/	55	ZR	18	104W	XL	7.5	900	340	715	245	
255	/	55	R	18	109W	XL	8.0	1030	340	737	265	
255	/	60	R	18	112V	XL	7.5	1120	340	763	260	
225	/	45	R	19	96W	XL	7.5	710	340	685	225	
255	/	50	R	19	107W	XL	8.0	975	340	739	265	
255	/	55	R	19	111W	XL	8.0	1090	340	763	265	
275	/	30	ZR	19	96Y	XL	9.5	710	340	649	278	
275	/	35	ZR	19	100Y	XL	9.5	800	340	675	278	
285	/	45	R	19	111W	XL	9.5	1090	340	739	285	
235	/	45	ZR	20	100W	XL	8.0	800	340	720	236	
245	/	35	ZR	20	95W	XL	8.5	690	340	680	248	
245	/	40	ZR	20	99Y	XL	8.5	775	340	704	248	
245	/	45	ZR	20	103Y	XL	8.0	875	340	728	243	
245	/	50	ZR	20	102Y		7.5	850	300	754	253	
255	/	35	ZR	20	97W	XL	9.0	730	340	686	260	
255	/	40	ZR	20	101Y	XL	9.0	825	340	712	260	
255	/	45	ZR	20	105W	XL	8.5	925	340	738	255	
255	/	50	ZR	20	109W	XL	8.0	1030	340	764	265	
255	/	55	ZR	20	110W	XL	8.0	1060	340	788	265	
265	/	45	ZR	20	108Y	XL	9.0	1000	340	746	266	
265	/	50	R	20	111W	XL	8.5	1090	340	774	277	
275	/	30	ZR	20	97Y	XL	9.5	730	340	674	278	
275	/	35	ZR	20	102Y	XL	9.5	850	340	700	278	
275	/	40	R	20	106W	XL	9.5	950	340	728	278	
275	/	45	R	20	110W	XL	9.0	1060	340	756	273	
275	/	50	ZR	20	113W	XL	8.5	1150	340	784	284	
275	/	55	R	20	117W	XL	8.5	1285	340	810	284	
275	/	60	R	20	119V	XL	8.0	1360	340	838	279	
285	/	50	ZR	20	116W	XL	9.0	1250	340	794	297	
315	/	35	ZR	20	110Y	XL	11.0	1060	340	728	320	
265	/	40	ZR	21	105W	XL	9.5	925	340	745	271	
265	/	45	ZR	21	104W		9.0	900	300	771	266	
275	/	40	ZR	21	107Y	XL	9.5	975	340	753	278	
275	/	45	ZR	21	110W	XL	9.0	1060	340	781	273	
285	/	35	ZR	21	105Y	XL	10.0	925	340	733	290	
295	/	35	ZR	21	107Y	XL	10.5	975	340	739	301	
295	/	40	ZR	21	111Y	XL	10.5	1090	340	769	301	
325	/	30	ZR	21	108W	XL	11.5	1000	340	729	331	
275	/	40	ZR	22	107Y	XL	9.5	975	340	779	278	
285	/	35	ZR	22	106W	XL	10.0	950	340	759	290	
295	/	30	ZR	22	103W	XL	10.5	875	340	737	301	



S3000

35/40/45/55

S3000 is a drift tyre that pursues high-speed driving control and enjoys endless fun of driving on the street and track



It adopts the new unique filler and the special tread formula of multi-functional materials to quickly reach the hot-melt temperature, soften the hardness of the tread, generate viscosity, provide great grip when driving and braking, and prevent sideslip when turning;



The cross support design makes the rigidity of the center tire shoulder most moderate distribution, improves the grounding when turning, and ensures the drainage performance;



The enhanced sidewall design can prevent the bulge or damage when the tire collides with the edge of the track. When the tire accelerates, brakes or turns at high speed, it can bear strong longitudinal tension and centrifugal force;



The tire adopts aramid, super strong steel wire and special sidewall rubber to improve tire rigidity, reduce tire roll when cornering and ensure good handling;



The specific formula design is applicable to comprehensive track, dry track and wet track respectively, with tread hardness of 45-88, providing excellent grip and low hardness wear resistance under various extreme conditions;

Ultra grip performance

by adopting the newly developed racing tread rubber 2R



Draining Braking Handling Grip performance



Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
235	/	40	R	18	95W	XL	8.5	690	340	645	241	
265	/	35	R	18	97W	XL	9.5	730	340	643	271	
255	/	35	ZR	18	94Y	XL	9.0	670	340	635	260	
225	/	40	ZR	18	92W	XL	8.0	630	340	637	230	
225	/	45	ZR	18	95W	XL	7.5	690	340	659	225	
215	/	45	ZR	17	91W	XL	7.0	615	340	626	213	
235	/	45	ZR	17	97W	XL	8.0	730	340	644	236	
205	/	55	ZR	16	94W	XL	6.5	670	340	632	214	

KAPSEN®



K737

45/50/55/60/65/70/80

K737 is a kind of tyre designed with silencing block + multi pitch arrangement pattern, it reduces the driving noise, improves the comfort, and creates a passenger car tire with safety and comfort as the core for private car owners.



Lightweight tire design. Application of new materials such as super high strength steel wire and single wound bead steel wire, lightweight tire products improve comfort and reduce rolling resistance.



Multi pitch pattern design with optimized pitch arrangement, effectively reduce noise and improve driving feeling.



Three central ribs ensure stability in straight driving, and asymmetrical pattern design brings better handling.



The silencing block design can disturb the high-speed air flow in the groove, reduce the noise caused by the pump effect, and make it more quiet and comfortable.



High content of white carbon black and SSBR are used for tread, make the tyre get better wet braking performance and lower rolling resistance. More safety and energy conservation.




Noisy reduction



Fuel-efficient and environmental protection

Performance visualization

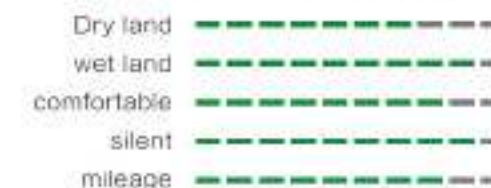

Application of advanced materials, light weight, fuel-efficient.

Multi pitch pattern design, effectively cut off air flow and reduce noise.

Using noise elimination block in groove, make more silent and comfortable.



Comfortable



Fuel-efficient



Silent



Safety

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
165	/	70	R	13	79T		5.0	437	300	562	170	
175	/	70	R	13	82T		5.0	475	300	576	177	
165	/	65	R	13	77T		5.0	412	300	544	170	
185	/	70	R	13	86T		5.5	530	300	590	189	
155	/	65	R	14	75T		4.5	387	300	558	157	
165	/	60	R	14	75H		5.0	387	300	554	170	
165	/	65	R	14	79H		5.0	437	300	570	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	82H		5.0	475	300	584	177	
175	/	70	R	14	84H		5.0	500	300	602	177	
185	/	60	R	14	82H		5.5	475	300	578	189	
185	/	65	R	14	86H		5.5	530	300	596	189	
185	/	70	R	14	88H		5.5	560	300	616	189	
195	/	60	R	14	86H		6.0	530	300	590	201	
195	/	70	R	14	91H		6.0	615	300	630	201	
175	/	65	R	15	84H		5.0	500	300	609	177	
185	/	55	R	15	82V		6.0	475	300	585	194	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	50	R	15	82V		6.0	475	300	577	201	
195	/	55	R	15	85V		6.0	515	300	595	201	
195	/	60	R	15	88V		6.0	560	300	615	201	
195	/	65	R	15	91V		6.0	615	300	635	201	
205	/	65	R	15	94V		6.0	670	300	647	209	
205	/	55	R	16	91V		6.5	615	300	632	214	
205	/	60	R	16	92V		6.0	630	300	652	209	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
215	/	60	R	17	96H		6.5	710	300	690	221	



H202

45/50/55/60/65/70

H202 is specially designed for private car users. The reasonable pattern pitch arrangement and special block design make it have extraordinary silence and excellent wet and dry grip. Its silicon-containing special formula reduces the rolling resistance coefficient, which is more environmentally friendly and fuel efficient. The optimized structural design improves the comfort of the tires and allows you to enjoy a beautiful car life!




Balanced comprehensive performance: mute, fuel saving, safety and comfort



The special tread contour and optimized cross-sectional contour design improve the handling stability and the comfort of the tire.



Optimized pattern pitch and sound absorption groove design of the shoulders bring excellent silent feeling to driving.



Excellent fuel-saving ability of silicon-containing formula, economical and money-saving.



Performance visualization

Dry land -----
wet land -----
comfortable -----
silent -----
mileage -----


Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
145	/	70	R	12	69T		4.5	325	300	509	150	
155	/	70	R	12	73T		4.5	365	300	523	157	
165	/	70	R	12	77T		5.0	412	300	537	170	
155	/	70	R	13	75T		4.5	387	300	548	157	
165	/	65	R	13	77T		5.0	412	300	544	170	
165	/	70	R	13	79T		5.0	437	300	562	170	
165	/	70	R	13	83T	XL	5.0	487	340	562	170	
175	/	70	R	13	82T		5.0	475	300	576	177	
185	/	70	R	13	86T		5.5	530	300	590	189	
155	/	65	R	14	75T		4.5	387	300	558	157	
165	/	60	R	14	75T		5.0	387	300	554	170	
165	/	65	R	14	79H		5.0	437	300	570	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	86T	XL	5.0	530	300	584	177	
175	/	70	R	14	84H		5.0	500	300	602	177	
185	/	60	R	14	82H		5.5	475	300	578	189	
185	/	65	R	14	86H		5.5	530	300	596	189	
195	/	60	R	14	86H		6.0	530	300	590	201	
205	/	60	R	14	88H		6.0	560	300	602	209	
205	/	70	R	14	95H		6.0	690	300	644	209	
215	/	70	R	14	96H		6.5	710	300	658	221	
165	/	55	R	15	75H		5.0	387	300	563	170	
175	/	55	R	15	77H		5.5	412	300	573	182	
175	/	60	R	15	81H		5.0	462	300	591	177	
175	/	65	R	15	84H		5.0	500	300	609	177	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	55	R	15	85V		6.0	515	300	595	201	
195	/	60	R	15	88V		6.0	560	300	615	201	
195	/	65	R	15	95H	XL	6.0	690	340	635	201	
205	/	60	R	15	91V		6.0	615	300	627	209	
205	/	65	R	15	94H		6.0	670	300	647	209	
215	/	60	R	15	94V		6.5	670	300	639	221	
215	/	65	R	15	96V		6.5	710	300	661	221	
195	/	60	R	16	89H		6.0	580	300	640	201	
205	/	45	R	16	87V	XL	6.0	545	340	590	206	
205	/	55	R	16	91V		6.5	615	300	632	214	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
205	/	65	R	16	95H		6.0	690	300	672	209	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
225	/	60	R	16	98H		6.5	750	300	676	228	
225	/	70	R	16	103T		6.5	875	300	722	228	
215	/	60	R	17	96H		6.5	710	300	690	221	
225	/	65	R	17	102H		6.5	850	300	724	228	
225	/	60	R	18	100H		6.5	800	300	727	228	



A4 special all Season product
with marvelous overall
performance.



A newly optimized profile design provides a comfortable ride all season.



Uses an all new asymmetric tread design to accommodate all season climate with excellent handling and steering performance in wet conditions.



Diverse and irregular pitch order decreases vibrations emitted from the tire to reduce noise.



Usage of functional ALL-silicon materials brings excellent handling capabilities in snowy and wet conditions.



Comfortable



Fuel-efficient



Silent



Safety

■ Performance
■ visualization

Dry land -----
wet land -----
comfortable -----
silent -----
mileage -----

Size				Li&SS		Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
225	/	45	R	17	94V	XL	7.5	670	340	634	225
185	/	55	R	15	82H		6.0	530	300	585	194
185	/	55	R	15	86H	XL	6.0	530	340	585	194
195	/	55	R	15	85H		6.0	515	300	595	201
195	/	55	R	16	87H		6.0	545	300	620	201
205	/	55	R	16	91V		6.5	670	300	632	214
205	/	55	R	16	94V	XL	6.5	670	340	632	214
215	/	55	R	16	97V	XL	7.0	730	340	642	226
185	/	60	R	14	82H		5.5	475	300	578	189
185	/	60	R	15	88H	XL	5.5	560	340	603	189
195	/	60	R	15	88H		6.0	560	300	615	201
205	/	60	R	16	96H	XL	6.0	710	340	652	209
155	/	65	R	14	75T		4.5	387	300	558	157
165	/	65	R	14	79T		5.0	437	300	570	170
175	/	65	R	14	82T		5.0	530	300	584	177
175	/	65	R	14	86T	XL	5.0	530	340	584	177
185	/	65	R	14	86T		5.5	530	300	596	189
185	/	65	R	15	88H		5.5	560	300	621	189
195	/	65	R	15	91H		6.0	690	300	635	201
195	/	65	R	15	95H	XL	6.0	690	340	635	201
165	/	70	R	13	79T		5.0	437	300	562	170
165	/	70	R	14	81T		5.0	515	300	588	170
165	/	70	R	14	85T	XL	5.0	515	340	588	170
175	/	70	R	13	82T		5.0	475	300	576	177
175	/	70	R	14	88T	XL	5.0	560	340	602	177

KAPSEN®



RS01

55/60/65/70

RS01 is designed for taxis. Adopt three grooves and large blocks design, especially the use of ultra-fine carbon black, which greatly improves the abrasion resistance and safety of the tire, reduces the rolling resistance of the tire, and improves operation for taxi drivers while ensuring safety income.



Two continuous central rib patterns provide superior abrasion resistance.



Hyperfine carbon ingredient improve longer mileage and safety, reducing rolling resistance. Bring security and benefit for taxi drivers.



Continuous shoulder block design provides superior driving stability and handling performance for cars under high load conditions.



Special contour design to prevent tire wear.

Wear-resisting durable

[Uniform design of grounding pressure]

Restrain shoulder deformation and shoulder wear

Longer performance life

Optimized the formula of tread rubber to strengthen the strength of tread and prevent the deformation of tread at the later stage of use



■ Performance visualization

Dry -----
Wet -----
Comfort -----
lower resistance -----
longer mileage -----

Size					LI&SS	XL	Standard Rm	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
165	/	70	R	13	83T	XL	5.0	487	340	562	170	
175	/	70	R	13	82T		5.0	475	300	576	177	
185	/	70	R	13	86T		5.5	530	300	590	189	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	86T	XL	5.0	530	340	584	177	
175	/	70	R	14	84T		5.0	500	300	602	177	
185	/	60	R	14	82T		5.5	475	300	578	189	
195	/	60	R	14	86T		6.0	530	300	590	201	
185	/	65	R	15	88T		5.5	560	300	621	189	
185	/	60	R	15	84H		5.5	500	300	603	187	
195	/	60	R	15	88H		6.0	560	300	615	201	
195	/	65	R	15	91H		6.0	615	300	635	201	
205	/	65	R	15	94H		6.0	670	300	647	209	
205	/	55	R	16	91V		6.5	615	300	632	214	

KAPSEN®



RS27 is a kind of SUV and pick-up truck tire with mixed pattern designed for unique climate and environment, which can adapt to all kinds of comprehensive road conditions.



Four main zigzag grooves and transverse grooves provide excellent wet grip performance.



Horizontal coarse and fine grooves cooperate with the design of the longitudinal small grooves to maximize the sediment discharge and greatly improve the grip on the sediment ground.




The design of large three-dimensional decorative steps at the shoulder of the tire provides great heat dissipation capacity, and the tire can cope with the hot and dry climate.



The high toughness and tear resistance formula is designed to ensure the performance of tyres in severe environment.

The design of base glue thickness strengthening

The thickness of the base rubber is strengthened to prevent the tread groove from cracking.

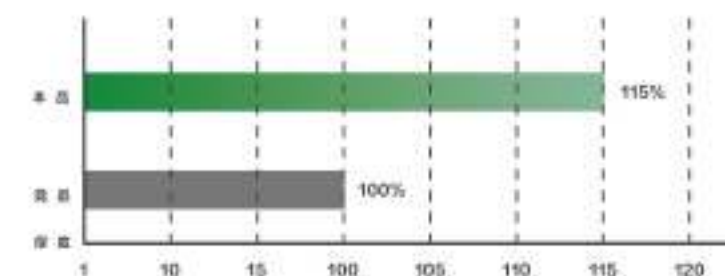

Performance visualization

- Dry
- Wet
- Comfort
- lower resistance
- longer mileage

Size						LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
								inch	kg	kPa	mm	mm	
255	/	70	R	15	C	112/110S		7.5	1120/1060	375	739	260	
205	/		R	16	C	110/108S		6.0	1110/1000	450	736	208	
235	/	85	R	16		120/116S		6.5	1400/1250	550	806	235	
265	/	65	R	17		112H		8.0	1120	300	776	272	
285	/	65	R	17		116H		8.5	1250	300	802	292	
285	/	60	R	18		116H		8.5	1250	300	799	292	

KAPSEN®



RS03

75/80/85

RS03 is designed especially for specialty trailer. The Z shape tread blocks provide excellent traction.




4 draining grooves bring excellent drainage.



Wider tread brings extra grips and traction.



Soft central blocks and hard Z shape blocks can meet all terrains.



Thick sidewall and special wearing compound bring long mileage.



■ Performance visualization

Dry -----
Wet -----
Comfort -----
lower resistance -----
longer mileage -----

Size						LI&SS	P.R	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
								inch	kg	kPa	mm	mm	
ST	175	/	80	R	13	91/87M	6C	5	615/545	350	610	177	
ST	205	/	75	R	14	100/96M	6C	5.5	800/710	350	664	203	
ST	215	/	75	R	14	102/98M	6C	6	850/750	350	678	216	
ST	205	/	75	R	15	101/97M	6C	5.5	825/730	350	689	203	
ST	205	/	75	R	15	107/102M	8D	5.5	975/850	450	689	203	
ST	225	/	75	R	15	113/108M	8D	6	1150/1000	450	719	223	
ST	225	/	75	R	15	117/112M	10E	6	1285/1120	550	719	223	
ST	235	/	80	R	16	124/120M	10E	6.5	1600/1410	590	782	235	
ST	235	/	85	R	16	125/121M	10E	6.5	1650/1450	550	806	235	
ST	235	/	85	R	16	128/124M	12F	6.5	1800/1600	660	806	235	

KAPSEN®



RS01

60/65/70/75

RS01 is a light truck tire for business use, which can meet the overweight test under various extremely harsh conditions. It is specially designed to improve the business operation income.



Two continuous central rib patterns provide superior wear resistance.



The design of convex surface protruding out of tread pattern block provides superior traction performance and anti sideslip performance for tire.



The design of continuous pattern block on the shoulder provides excellent driving stability and handling performance for the vehicle under high load.



Special contour design to prevent tire eccentric wear.

Wear-resisting durable

[Uniform design of grounding pressure]

Restrain shoulder deformation and shoulder wear



Wear



Braking



Fuel-saving



Safety

Performance visualization

Dry -----
Wet -----
Comfort -----
lower resistance -----
longer mileage -----

Size						LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
								inch	kg	kPa	mm	mm	
165			R	13	LT	94/93R		4.5	670/650	450	594	165	
165	/	70	R	13	C	88/86R		5.0	560/530	375	562	170	
165	/	70	R	13	LT	88/86R		5.0	560/530	375	562	170	
175	/	70	R	14	LT	95/93R		5.0	690/650	375	602	177	
175	/	65	R	14	C	90/88T		5.0	600/560	375	584	177	
175	/	65	R	14	LT	90/88T		5.0	600/560	375	584	177	
185			R	14	C	102/100R		5.5	850/800	450	650	188	
185			R	14	LT	102/100R		5.5	850/800	450	650	188	
195			R	14	LT	105/103R		5.5	925/875	450	666	198	
195			R	15	C	106/104R		5.5	950/900	450	693	196	
195			R	15	LT	106/104R		5.5	950/900	450	693	196	
195	/	70	R	15	LT	99/96R		6.0	775/710	450	655	201	
205	/	65	R	15	LT	102/100T		6.0	800/730	450	647	209	
205	/	70	R	15	LT	106/104R		6.0	950/900	450	669	209	
215	/	65	R	15	LT	104/102T		6.5	900/850	375	661	221	
215	/	70	R	15	LT	104/101R		6.5	900/825	450	683	221	
225	/	70	R	15	LT	106/103R		6.5	950/875	450	697	228	
185	/	75	R	16	LT	100/97R		5.0	800/730	450	684	184	
195	/	65	R	16	LT	99/96R		6.0	775/710	450	660	201	
195	/	75	R	16	LT	102/99R		5.5	850/775	450	698	196	
205	/	65	R	16	LT	101/98R		6.0	825/750	450	672	209	
205	/	75	R	16	LT	113/111R		5.5	1150/1090	525	714	203	
215	/	65	R	16	LT	109/107R		6.5	1030/975	475	686	221	
215	/	75	R	16	LT	112/109R		6.0	1120/1030	525	728	216	
225	/	65	R	16	LT	112/110R		6.5	1120/1060	475	698	228	
235	/	65	R	16	LT	115/113R		7.0	1215/1150	475	712	240	
195			R	14	LT	105/103R		5.5	925/875	450	666	198	

KAPSEN®



RW501

45/50/55/60/65/70/75



Winter type Ice/snow road Braking Handling

RW501 is a winter tire product specially designed for the ice and snow area, so that you can enjoy the driving pleasure on the ice and snow ground and the slippery road



Four longitudinal grooves and continuous transverse grooves from the middle to the shoulder provide excellent snow discharge performance.



Optimized tread design of shoulder and small absorption holes greatly improve the grip of ice and wet road.



The 3D three-dimensional groove design with fine tread improves the grip and friction of the ice and snow ground, and improves the rigidity of the pattern block to provide excellent handling and driving performance of the ice and snow ground.



Low temperature resistant compound formula of tread has strong grip on snow and ice, improves braking performance and ensures safety.

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
155	/	65	R	13	73T		4.5	365	300	532	157	
165	/	70	R	13	79T		5.0	437	300	562	170	
175	/	70	R	13	82T		5.0	475	300	576	177	
165	/	60	R	14	75T		5.0	387	300	554	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	82T		5.0	475	300	584	177	
175	/	70	R	14	84T		5.0	500	300	602	177	
185	/	60	R	14	82T		5.5	475	300	578	189	
185	/	65	R	14	86T		5.5	530	300	596	189	
185	/	70	R	14	88T		5.5	560	300	616	189	
195	/	60	R	14	86T		6.0	530	300	590	201	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	55	R	15	85H		6.0	515	300	595	201	
195	/	60	R	15	88H		6.0	560	300	615	201	
195	/	65	R	15	95T	XL	6.0	690	340	635	201	
205	/	65	R	15	94H		6.0	670	300	647	209	
235	/	75	R	15	109T	XL	6.5	1030	340	733	235	
195	/	60	R	16	89T		6.0	580	300	640	201	
205	/	55	R	16	91H		6.5	615	300	632	214	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
225	/	55	R	16	99H	XL	7.0	775	340	654	233	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
215	/	70	R	16	100T		6.5	800	300	708	221	
225	/	60	R	16	98T		6.5	750	300	676	228	
225	/	70	R	16	107T	XL	6.5	975	340	722	228	
235	/	60	R	16	100T		7.0	800	300	688	240	
235	/	70	R	16	106T		7.0	950	300	736	240	
245	/	70	R	16	107T		7.0	975	300	750	248	
215	/	50	R	17	95H	XL	7.0	690	340	648	226	
215	/	55	R	17	94H		7.0	670	300	668	226	
215	/	60	R	17	96H		6.5	710	300	690	221	
225	/	50	R	17	98H	XL	7.0	750	340	658	233	
225	/	55	R	17	101H	XL	7.0	825	340	680	233	
225	/	60	R	17	99H		6.5	775	300	702	228	
225	/	65	R	17	102T		6.5	850	300	724	228	
235	/	55	R	17	103H	XL	7.5	875	340	690	245	
235	/	65	R	17	108T	XL	7.0	1000	340	738	240	
245	/	65	R	17	111H	XL	7.0	1090	340	750	248	
215	/	55	R	18	95H		7.0	690	300	693	226	
225	/	45	R	18	91H		7.5	615	300	659	225	
225	/	55	R	18	98H		7.0	750	300	705	233	
225	/	60	R	18	104H	XL	6.5	900	340	727	228	
235	/	50	R	18	101H	XL	7.5	825	340	693	245	
235	/	55	R	18	100H		7.5	800	300	715	245	
235	/	60	R	18	107T	XL	7.0	975	340	739	240	
245	/	45	R	18	100H	XL	8.0	800	340	677	243	
245	/	60	R	18	105H		7.0	925	300	751	248	
255	/	55	R	18	105H		7.0	925	300	737	265	
265	/	60	R	18	114T	XL	8.0	1180	340	775	272	
285	/	60	R	18	120H	XL	8.5	1400	340	799	292	
245	/	55	R	19	103H		7.5	875	300	753	253	
255	/	50	R	19	107H	XL	8.0	975	340	739	265	
265	/	50	R	19	110H	XL	8.5	1060	340	749	277	
255	/	50	R	20	109H	XL	8.0	1030	340	764	265	
275	/	45	R	20	110H	XL	9.0	1060	340	756	273	
165			R	13	94/93T		4.5	670/650	450	596	167	
175			R	14	99/98T		5.0	775/730	450	634	178	
185			R	14	102/100S		5.5	850/800	450	650	188	
195	/	70	R	15	99/96Q		6	775/710	450	655	201	
205	/	70	R	15	106/104S		6.0	950/900	450	669	209	
225	/	70	R	15	106/103S		6.5	950/875	450	697	228	
215	/	70	R	15	98/95T		6.5	750/690	350	683	221	
215	/	75	R	15	100/97T		6.0	800/730	350	703	216	
235	/	75	R	15	104/101T		6.5	900/825	350	733	235	



AW11

45/50/55/60/65/70/75

AW11 is specially designed for light truck in ice and snow area of winter, it makes you enjoy the driving on the ice & snow road and slippery road.



Right-angle design on shoulder, Anti-slip, enhance driving stability.



The wide pattern block design of the tread, elevating angle can effectively prevent the tire from skidding on the ice and snow road; the pattern block widening design of the shoulder of the tire and staggered semi-circular arrangement can make the tire have more effective traction and braking ability in normal driving and turning.



The 3D three-dimensional groove design with fine tread improves the grip and traction of the ice and snow ground, and improves the rigidity of the pattern block to provide excellent handling and driving performance of the ice and snow ground.



Low-temperature tread compound, perform strong grip on snow and ice, improve braking performance, ensure safety in motion.



【 Tread foaming technology 】 :

A sponge like structure with appropriate density and uniform size is formed in the tread area to absorb ice moisture.

【 Design of widened driving surface 】 :

The driving surface is 5-20mm wider than that of summer tyres, enhancing driving force and braking force.



3D groove Normal groove

【 3D groove design 】 :

The meshing effect between grooves is formed during driving, which reduces the relative movement between pattern blocks and increases the grounding area.

【 Low hardness tread formula 】 :

normal temperature: 45-50ha, - 30 ℃: about 50ha, keep the tread soft and ensure the grip.



Winter tyre



Ice/snow road



Braking



Handling

■ Performance visualization

icy
snowy
dry
comfort
mute


Size					L&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
215	/	70	R	15	98/95T		6.5	750/690	350	683	221	
215	/	75	R	15	100/97T		6.0	800/730	350	703	216	
235	/	75	R	15	104/101T		6.5	900/825	350	733	235	

KAPSEN®




Winter type Low snow road Braking Handling

AW33 is a winter tire product specially designed for the ice and snow area, so that you can enjoy the driving pleasure on the ice and snow ground and the slippery road.




More crosswires and multiple pattern grooves cross, which can fully absorb water, avoid water film, and effectively form snow pillars to improve snow discharge performance.



Unsymmetrical tread lines maintain rigidity on the outside and provide more ground area, improve the grip of dry wetland and ice surface sharp turning.



3D and ultra-thin groove design with fine tread improves the grip of ice and snow ground and ensures the handling and driving performance of ice and snow ground.



The low temperature resistant compound formula of tread has strong grip on snow and ice, and can ensure excellent handling performance.

Size					L&S	/XL	Standard Rim	Max Load	Max. Pressure	Overall Diameter	Section Width	Flaring
							Inch	kg	kPa	mm	mm	
155	/	65	R	13	73T		4.5	365	300	532	157	
165	/	70	R	13	79T		5.0	427	300	562	170	
165	/	80	R	14	75T		5.0	387	300	554	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	85	R	14	85T	XL	5.0	530	340	584	177	
175	/	70	R	14	88T	XL	5.0	560	340	602	177	
185	/	60	R	14	82T		5.5	475	300	578	189	
185	/	65	R	14	86T		5.5	530	300	596	189	
185	/	70	R	14	89T		5.5	560	300	616	189	
185	/	80	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	55	R	15	85H		6.0	515	300	595	201	
195	/	60	R	15	88H		6.0	560	300	615	201	
195	/	65	R	15	95T	XL	6.0	690	480	635	201	
205	/	65	R	15	94H		6.0	670	300	647	209	
195	/	60	R	16	89T		6.0	580	300	640	201	
205	/	55	R	16	91H		6.5	615	300	632	214	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
225	/	55	R	16	99H	XL	7.0	775	440	654	233	
215	/	60	R	16	92H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
215	/	70	R	16	100T		6.5	800	300	708	221	
225	/	60	R	16	98T		6.5	750	200	676	228	
225	/	70	R	16	102T	XL	6.5	975	340	722	228	
235	/	60	R	16	100T		7.0	800	300	689	240	
245	/	70	R	16	106T		7.0	950	300	736	240	
245	/	70	R	16	107T		7.0	975	300	750	240	
265	/	70	R	16	112T		8.0	1120	300	778	272	
205	/	45	R	17	88H	XL	7.0	560	340	616	206	
205	/	50	R	17	93H	XL	6.5	650	480	638	214	
215	/	50	R	17	95H	XL	7.0	690	340	648	228	
215	/	55	R	17	94H		7.0	670	300	668	226	
215	/	60	R	17	98H		6.5	710	300	690	221	
225	/	45	R	17	94H	XL	7.5	670	340	634	225	
225	/	50	R	17	98H	XL	7.0	750	440	658	233	
225	/	55	R	17	101H	XL	7.0	825	340	680	233	
225	/	60	R	17	99H		6.5	775	300	702	228	
225	/	65	R	17	102T		6.5	850	300	724	228	
235	/	50	R	17	100H	XL	7.5	800	440	668	246	
235	/	55	R	17	103H	XL	7.5	875	340	690	246	
235	/	65	R	17	109T	XL	7.0	1000	340	738	240	
245	/	65	R	17	111H	XL	7.0	1090	340	750	248	
265	/	65	R	17	112T		8.0	1120	300	776	272	
265	/	65	R	17	116H	XL	8.0	1250	440	776	272	
215	/	35	R	18	95H		7.0	690	400	693	226	
225	/	40	R	18	92H	XL	8.0	630	340	637	230	
225	/	50	R	18	99H	XL	7.0	775	340	683	233	
225	/	55	R	18	96H		7.0	750	300	705	233	
225	/	60	R	18	104H	XL	6.5	900	340	727	240	
235	/	50	R	18	101H	XL	7.5	825	340	693	245	
235	/	55	R	18	104H		7.5	880	300	715	245	
235	/	60	R	18	107T	XL	7.0	975	340	740	240	
245	/	40	R	18	97H	XL	8.5	730	340	653	248	
245	/	45	R	18	100H	XL	8.0	800	340	677	243	
255	/	55	R	18	105H		8.0	925	300	737	265	
265	/	60	R	18	114T	XL	8.0	1180	340	775	272	
285	/	60	R	18	120H	XL	8.5	1400	340	799	292	
225	/	45	R	19	96H	XL	7.5	710	340	685	225	
225	/	55	R	19	99H		7.0	775	300	731	233	
235	/	45	R	19	99H	XL	8.0	775	340	695	236	
235	/	50	R	19	103H	XL	7.5	875	340	719	245	
235	/	55	R	19	105H	XL	7.5	925	340	741	245	
245	/	45	R	19	102H	XL	8.0	850	340	703	243	
245	/	50	R	19	105H	XL	7.5	925	340	729	253	
245	/	55	R	19	103H		7.5	875	300	753	253	
255	/	45	R	19	104H	XL	8.5	900	340	713	255	
255	/	50	R	19	107H	XL	8.0	975	340	739	265	
255	/	55	R	19	111H	XL	8.0	1090	340	763	265	
265	/	50	R	19	110H	XL	8.5	1060	340	749	277	
245	/	40	R	20	99H	XL	8.5	775	340	704	248	
245	/	45	R	20	103H	XL	8.0	875	340	728	243	
255	/	50	R	20	109H	XL	8.0	1030	340	764	265	
265	/	50	R	20	111H	XL	8.5	1090	340	774	277	
275	/	40	R	20	106H	XL	9.5	950	340	728	278	
275	/	45	R	20	110H	XL	9.0	1060	340	756	273	
315	/	35	R	20	110H	XL	11.0	1060	340	728	320	
205	/	55	RF	16	91H		6.5	615	300	632	214	
205	/	45	RF	17	88H	XL	7.0	560	340	616	206	
205	/	50	RF	17	93H	XL	6.5	650	340	638	214	
225	/	45	RF	17	94H	XL	7.5	670	340	634	225	
225	/	50	RF	17	98H	XL	7.0	750	340	658	233	
225	/	55	RF	17	101H	XL	7.0	825	340	680	233	
225	/	40	RF	18	92H	XL	8.0	630	340	637	230	
225	/	50	RF	18	99H	XL	7.0	775	340	683	233	
235	/	50	RF	18	101H	XL	7.5	825	340	693	245	
245	/	40	RF	18	97H	XL	8.5	730	340	652	248	
245	/	45	RF	18	100H	XL	8.0	800	340	677	243	
255	/	55	RF	18	105H		8.0	925	300	737	265	
235	/	45	RF	19	99H	XL	8.0	775	340	695	236	
235	/	50	RF	19	103H	XL	7.5	875	340	719	245	
235	/	55	RF	19	105H	XL	7.5	925	340	741	245	
245	/	45	RF	19	102H	XL	8.0	850	340	703	243	
245	/	50	RF	19	105H	XL	7.5	925	340	729	253	
255	/	50	RF	19	107H	XL	8.0	975	340	739	265	
275	/	40	RF	20	106H	XL	9.5	950	340	728	278	
315	/	35	RF	20	110H	XL	11.0	1060	340	728	320	



H201

55/70/75

H201 is a high-end touring tire with four seasons pattern. Its super long wearing performance has excellent dry and wet performance. With low heat formula, it can bring safety guarantee for long-distance travel. At the same time, the optimized tire



Symmetrical pattern brings low noise



Four broad grooves provide good drainage performance




Special pattern and formula design are adopted to ensure super long mileage.



Seamless steel wire ring and crown strip ensure the uniformity of tire and improve the comfort.



The latest formula of solution polymerized styrene and silicon technology makes the grounding area closer; effectively improves wetland performance, reduces rolling resistance and provides excellent handling performance.



Validation of bionic technology of road noise analysis of road noise caused by tire driving on rough road, adjustment of tire structure, reduction of road noise.



Comfortable



Fuel-efficient



Silent



Safety

Performance visualization

Dry -----
wet road -----
sport -----
comfort -----
muted -----

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
205	/	70	R	15	96T		6.0	710	300	669	209	
205	/	75	R	15	97T		5.5	730	300	689	203	
215	/	70	R	15	98T		6.5	750	300	683	221	
215	/	75	R	15	100T		6.0	800	300	703	216	
225	/	70	R	15	100T		6.5	800	300	697	228	
225	/	75	R	15	102T		6.0	850	300	719	223	
235	/	75	R	15	105T		6.5	925	300	733	235	
205	/	55	R	16	91T		6.5	615	300	632	214	

KAPSEN®



VMI EXXIUM building machine from Holland



COMERIO ERCOLE FOUR-Roll calendar from Italy



GREATOO Tire Curing Press from China



HIMILE Tire Mold from China



KOKUSAI Uniformity and Balancing Machine from Japan



FISHER CUTTING MACHINE FROM GERMANY

In ch Up

- Improving Stability

- Improving Handling

- Improving Breaking

Different sizes with same overall diameter



14inch



15inch



16inch



17inch

Size	Inch Up Size
155/80R13	165/65R14
	175/65R14
145/70R12	165/60R12
	155/60R13
	165/60R13
175/70R13	185/65R14
	185/60R14
	195/60R14
185/70R14	185/65R14
	195/65R14
	195/60R15
	205/60R14
185/70R14	195/65R14
	205/60R14
	195/65R14
	195/60R15
195/70R14	195/65R15
	205/65R15
	205/60R15
	215/60R15
175/65R14	185/60R14
	195/60R14
	195/55R15
	195/50R15
185/60R14	195/60R14
	205/60R14
	205R55R15
195/55R14	215/55R15
185/65R15	195/60R15
	205/60R15
	215/55R15
	205/55R16

Size	Inch Up Siz
195/65R15	205/60R15
	215/60R15
	215/55R16
205/65R15	215/60R15
	225/55R16
215/65R15	225/60R16
175/60R14	185/55R14
	195/55R14
	195/50R15
185/60R14	195/55R14
	195/50R15
	205/50R15
	215/40R16
195/60R14	215/50R16
	215/45R15
195/60R15	215/55R15
	215/50R15
	225/50R15
	205/55R16
	215/50R16
	225/45R16
205/60R15	235/40R17
	225/50R15
	215/55R16
	225/50R16
	245/45R16
	245/40R17
215/60R15	225/55R16
	235/50R16
	245/45R16
	245/40R17
	255/40R17

Size	Inch Lip Size
215/60R16	245/45R17
	255/45R17
	255/40R18
225/60R16	245/50R16
185/55R15	195/50R15
	205/50R15
	205/45R16
	215/40R16
195/55R15	205/50R15
	215/50R15
	205/50R16
	215/45R16
205/55R15	215/50R15
	225/50R15
	205/50R16
	215/50R16
	225/45R16
205/55R16	215/50R16
	225/50R16
	245/45R16
	225/45R17
	235/45R17
	245/40R17

Size	Inch Up Size
215/55R16	225/50R16
	235/50R16
	245/50R16
	245/45R16
	215/50R17
	225/50R17
	235/45R17
	245/45R17
	255/40R17
	255/40R17
235/40R18	
245/40R18	
225/55R16	245/45R17
195/50R15	205/45R16
205/50R15	215/45R16
205/50R16	225/45R16
	245/45R16
215/50R16	245/45R16
	225/45R17
	235/40R17
	245/40R17
	255/40R17
225/50R16	245/45R16
	235/45R17
	255/40R17
215/50R17	235/45R17
	245/45R17
	245/40R17
	255/40R17
	235/40R18
245/40R18	